




## E350 HOT DIPPED GALVANIZED POST SHORES

### EXTENSION RANGE & SAFE WORKING LOADS:

Extension Range (mm)	Max Capacity of Prop E350	
	Top	Bottom
1800		
1900		
2000	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2100	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2200	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2300	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2400	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2500	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2600	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2700	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2800	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
2900	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
3000	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
3100	9,262 LBS (41.2 KN)	9,262 LBS (41.2 KN)
3200	9,127 LBS (40.6 KN)	9,262 LBS (41.2 KN)
3300	8475 LBS (37.7 KN)	9,262 LBS (41.2 KN)
3400	7935 LBS (35.3 KN)	9,262 LBS (41.2 KN)
3500	7193 LBS (32 KN)	8,655 LBS (38.5 KN)
3600		
3700		
3800		
3900		
4000		

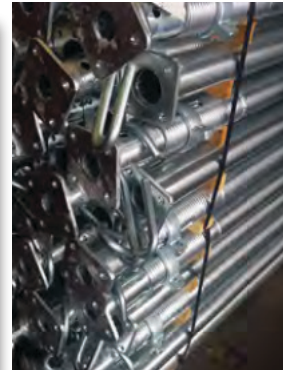

### FEATURES:

- HOT DIPPED GALVANIZED TO INCREASE LIFE SPAN OF THE SHORE
- SELF CLEANING THREAD
- STEEL FORGED COLLAR THAT IS STRONGER AND MORE DURABLE
- FINE ADJUSTMENT THAT COVERS RANGE FROM 2.00 M FULLY CLOSED UP TO 3.50 M FULLY EXTENDED
- SAFETY INNER TUBE STOP WHICH PREVENTS TUBES COMING APART WHILE THEY ARE TRANSFERRED
- SAFETY HAND TRAP PREVENTION, THE INNER TUBE IS MADE LONGER THAN OUTER TUBE FOR SAFE HANDLING DESIGN
- SHORING & RESHORING, POSTS CAN BE USED IN BOTH NORMAL AND UPSIDEDOWN POSITIONS
- E CLASS POST SHORES ARE MADE ACCORDING TO VERY STRICT EN1065 EUROPEAN NORMS AND STANDARDS
- QUALITY CONFIRMED FROM GERMAN INSTITUTES
- CERTIFIED FROM THE PRESTIGIOUS MPA STUTTGART UNIVERSITY, GERMANY AS A PROOF OF HIGH QUALITY
- MANUFACTURED BY SYMONS WHICH FOLLOWS ISO 9001/45001 STANDARDS

**HEIGHT RANGE: 2.00 M - 3.50M**  
**WEIGHT: 27.84 LBS EACH**